

Hydro-electric pressure switch

Type HED 5

RE 50056

Edition: 2016-09

Replaces: 09.15



TB0229

- ▶ Component series 3X
- ▶ Maximum operating pressure 400 bar

**Features**

- ▶ 4 pressure ratings
- ▶ Electrical connection
 - with large cubic connector
- ▶ Micro switch with NC/NO contact function
- ▶ Potential-free switching of currents from 1 mA to 2 A
- ▶ UL approval
- ▶ CCC approval (except for MT version)

Contents

Features	1
Ordering data	2
Function, section, symbol	3
Technical data	4
Characteristic curves: Switching pressure differential	6
Dimensions	7
Electrical connection	8
Mating connectors	8
Further information	8

Ordering data

01	02	03	04	05	06	07
HED5	OH	-	3X	/	K14	*

01	Piston type pressure switch	HED5
02	Flange connection	OH
03	Component series 30 ... 39 (30 ... 39: unchanged installation and connection dimensions)	3X
04	Max. pressure rating 50 bar	50
	Max. pressure rating 100 bar	100
	Max. pressure rating 200 bar	200
	Max. pressure rating 350 bar	350

Electrical connection

05	Individual connection	
	Without mating connector; connector DIN EN 175301-803	K14 ¹⁾

Seal material

07	NBR seals	no code
	FKM seals	V
	Low-temperature seal (max. 315 bar)	MT
	Observe compatibility of seals with hydraulic fluid used! (Other seals upon request)	
08	Further details in the plain text	

¹⁾ Mating connectors, separate order, see accessories

Accessories

- Mating connectors for the electrical connection see Page 8.

Function, section

Hydro-electric pressure switches of type HED 5 are piston type pressure switches.



They basically consist of housing (1), installation kit with piston (2), compression spring (3), adjustment element (4) and micro switch (5).

The pressure to be monitored acts on the piston (2). The latter is supported by the spring plate (6) and acts against the continuously adjustable force of the compression spring (3). The spring plate (6) transmits the movement of the piston (2) onto the micro switch (5). This switches the electric circuit on or off, depending on the circuit set-up.

Notes:

In order to increase the life cycle, the pressure switch should be mounted with low vibrations and protected from hydraulic pressure surges.

Symbol

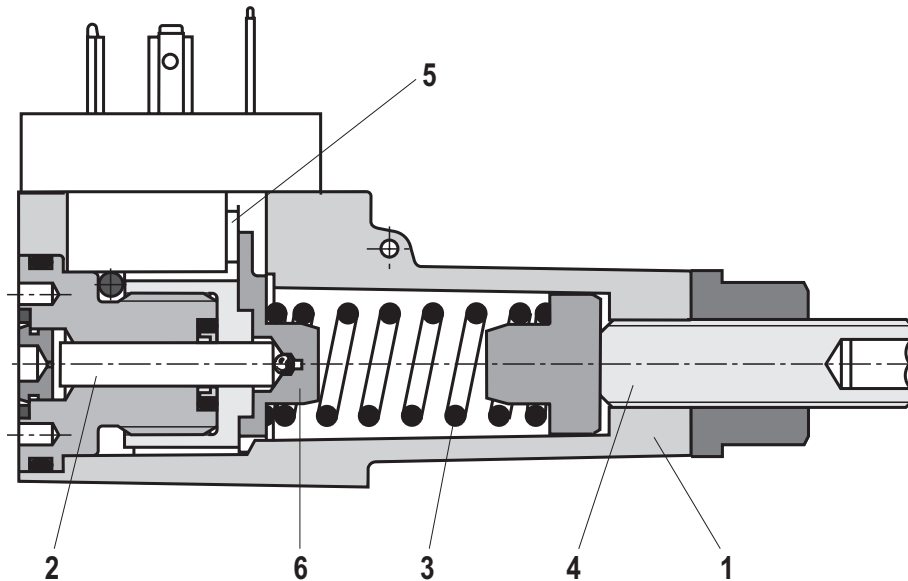

Technical data

(For applications outside these parameters, please consult us!)

General	
Mass	kg 0,2
Installation position	any
Ambient temperature range	°C -30 to +50 (NBR seals) -20 to +50 (NBR seals) -40 to +50 (low-temperature seals)
Sine test according to DIN EN 60068-2-6:1996-05	10...2000 Hz, max. 10 g, 10 double cycles
Transport shock according to DIN EN 60068-2-27:1995 03	Half-sine 15 g / 11 ms, 3 x in positive direction, 3 x negative direction (a total of 6 single shocks per axis)
Noise test according to DIN EN 60068-2-64:1995-08	20...2000 Hz, 14 g _{RMS} , 24 h
Conformity	<ul style="list-style-type: none"> ▶ CE DIN EN 61058-1: 2002 / A2: 2008 DIN EN 60947-1: 2007 / A1: 2011 DIN EN 60947-5-1: 2004 / A1: 2009 DIN EN 60529: 1991 / A2: 2013 ▶ UL UL 508 17th edition File No E223220 (up to 350bar) ▶ CCC GB 14048.5-2008

Hydraulic					
Pressure rating	bar	50	100	200	350
Max. operating pressure	<ul style="list-style-type: none"> ▶ NBR/FKM seals ▶ MT version 	bar	350	350	350
Pressure adjustment range (decreasing)	bar	5...50	10...100	15...200	25...350
Pressure differential per rotation ¹⁾	bar	≈10	≈17	≈38	≈60
Hydraulic fluid ¹⁾	see table below				
Hydraulic fluid temperature range (at the valve operating ports)	°C	-30 ... +80 (NBR seals) -20 ... +80 (FKM seals) -40 ... +80 (low-temperature seals)			
Viscosity range	mm ² /s	10 ... 800			
Maximum permissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)	Class 20/18/15 ²⁾				
Load cycles	≥ 4 million				

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Bio-degradable	HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM, low-temperature seals	DIN 51524	90220
Bio-degradable	▶ Insoluble in water	HETG	ISO 15380	90221
		HEES		
	▶ Soluble in water	HEPG	ISO 15380	
Schwerentflammbar	▶ Water-free	HFDU, HFDR	ISO 12922	90222
	▶ Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	ISO 12922	90223



Important information on hydraulic fluids:

- ▶ For more information and data about the use of other hydraulic fluids, refer to data sheets above or contact us!
- ▶ There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- ▶ The flash point of the hydraulic fluid used must be 40 K higher than the maximum solenoid surface temperature.

▶ Flame-resistant – contains water:

- Maximum pressure differential per control edge 50 bar
- Pressure pre-loading at the tank port > 20% of the pressure differential, otherwise increased cavitation
- Life cycle as compared to operation with mineral oil HL, HLP 50 to 100%

- ▶ **Bio-degradable and flame-resistant:** When using these hydraulic fluids that are simultaneously zinc-solving, zinc may accumulate (700 mg zinc per pole tube).

Technical data

(For applications outside these parameters, please consult us!)

Electrical			
Electrical connection		EN 175301-803, 3-pole + PE	
Maximum connection cross-section (mating connector)	mm ²	1,5	
Line entry (mating connector)		M16 x 1,5	
Protection class according to DIN EN 60529		IP 65 with mating connector fitted and screwed in place	
Maximum switching frequency	1/h	4800	
Switching accuracy (repetition accuracy)		< ± 1% of the set pressure	
Switches		according to VDE 0630-1/DIN EN 61058-1	
Transition resistance	mΩ	< 50	
Insulation coordination		Overvoltage category 3	
Contamination		Degree of contamination 3	
Bounce time	▶ ON	ms	< 5
	▶ OFF	ms	< 5
			Utility model according to IEC 60947
Minimum current	mA	1,0 with 24 V DC	DC-12
Maximum current	A	0,5 at 50 V DC, inductive	DC-22
		0,2 at 125 V DC, inductive	DC-22
		0,1 at 250 V DC, inductive	DC-22
		2,0 at 250 V AC	AC-12

Switching power			
Switching cycles	Voltage <i>U</i> in V	Ohmic load max. in A	Inductive load, max. in A
2 million	250, AC	2 A for 2 million circuits (AC-12)	0,5 A, cos. φ = 0,6 for 2 million circuits (DC-12)
2 million	24, DC	2 A for 2 million circuits (DC-12)	0,5 A for 2 million circuits ³⁾
5 million	24, DC	5,0 mA for 5 million circuits (DC-12)	-

- 1) Direction of rotation:
 – clockwise → set pressure increase
 – anti-clockwise → set pressure decrease

- 3) Value does not comply with any utility category according to IEC 60947





- 2) The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components. For the selection of the filters see www.boschrexroth.com/filter.



Notes:

All variants can be unloaded to $p_{\min} = 0$ bar.
 (Observe the switching pressure differential!)


Characteristic curves: Switching pressure differential
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)

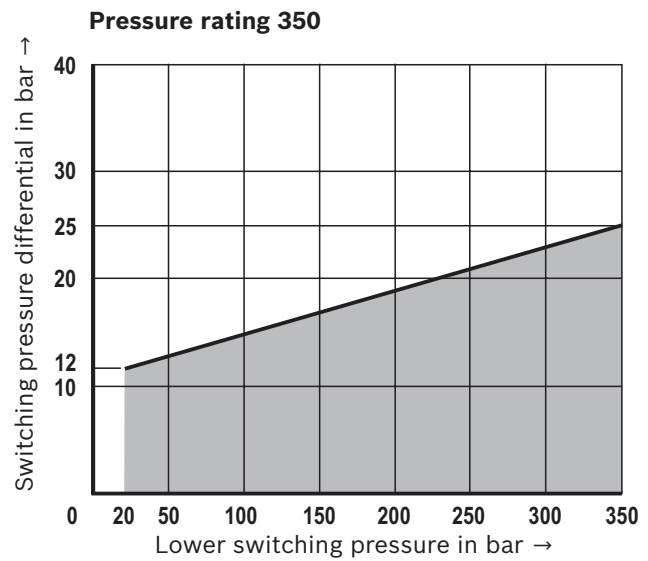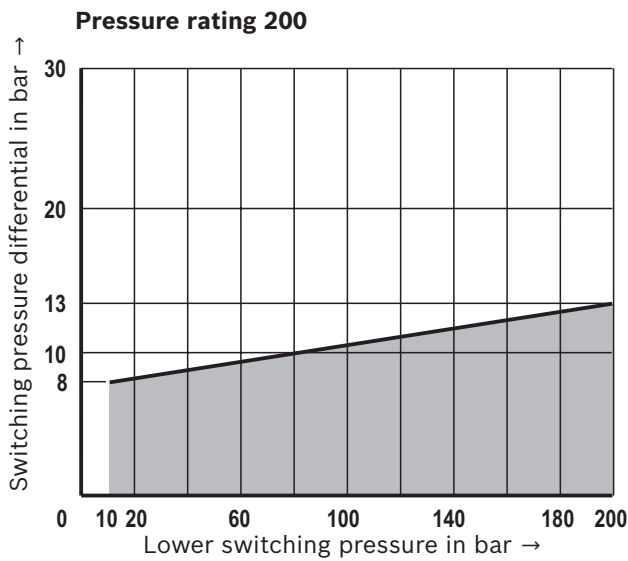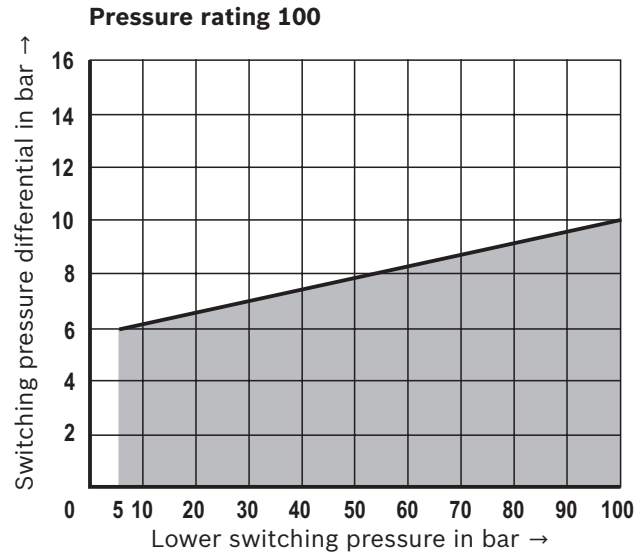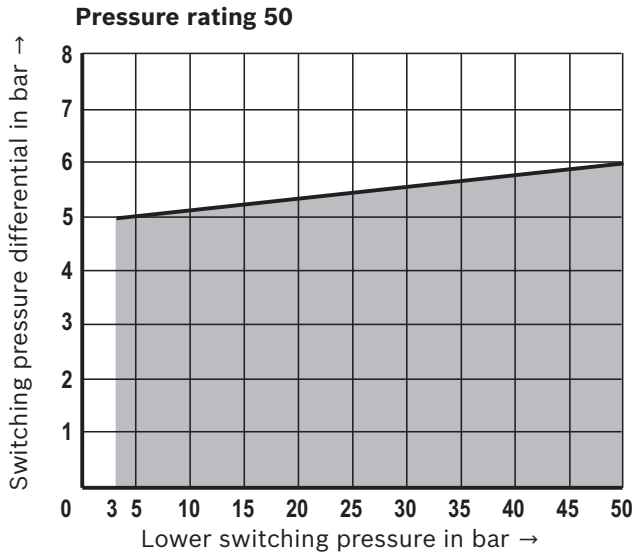

Notes:

The switching pressure differential may increase within the course of the life cycle due to the deterioration of the oil quality and the number of load cycles.

Dimensions: Type HED 5 ...K14
(dimensions in mm)

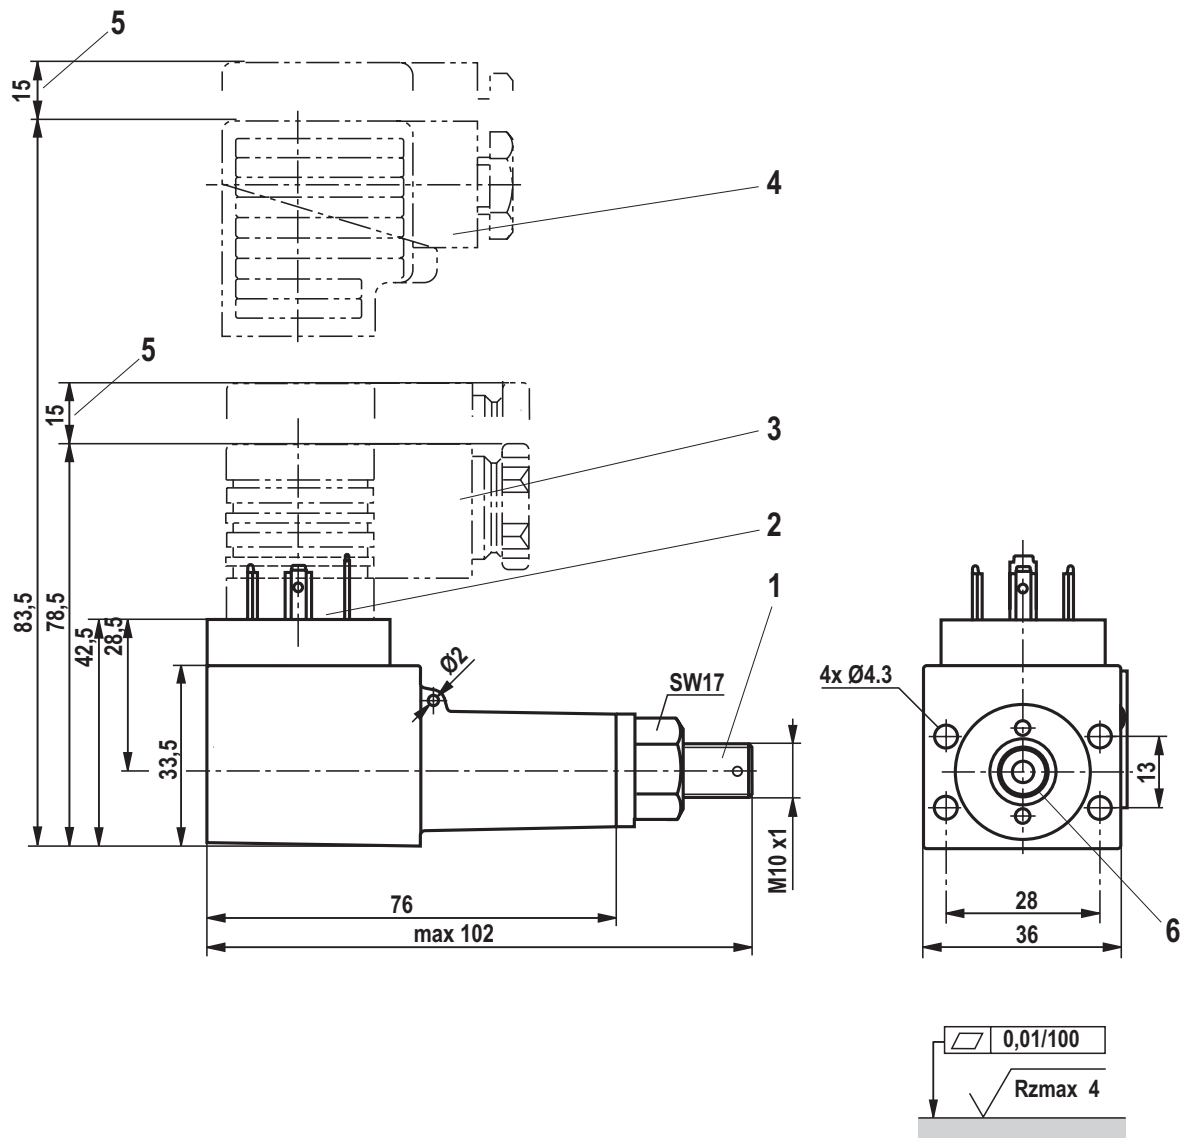


Required surface quality of the device contact surface

- 1 Adjustment element
- 2 Plug-in connection according to EN 175301-803 (connection „K14“)
- 3 Mating connector without circuitry (separate order, see page 8)
- 4 Mating connector with circuitry (separate order, see page 8)
- 5 Space required to remove the mating connector
- 6 Seal ring (connection bore of the counterpart: max. $\varnothing 6$)

Valve mounting screws (separate order)
4 hexagon socket head cap screws
ISO 4762-M4X45-10.9-fZn-240h-L
(friction coefficient $\mu_{\text{total}} = 0.09$ to 0.14)
Tightening torque $M_A = 2 \text{ Nm} \pm 10 \%$
Material no. **R913000370**

Electrical connection according to DIN EN 175301-803

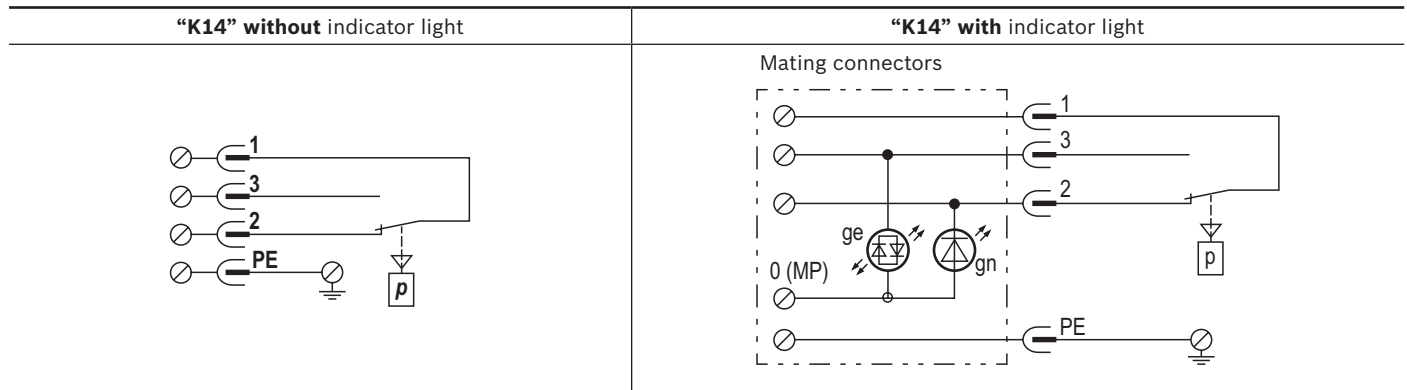

Switching function
 Terminals 1-2: Contact opens in case of pressure increase
 Terminals 1-3: Contact closes in case of pressure increase

Mating connectors according to DIN EN 175301-803

For connection "K14"						
For details and more mating connectors see data sheet 08006						
	Without circuitry	Material number				
Color	240 V, -40...+125 °C	With circuitry (indicator light) AC/DC, -20...+60 °C				
black	R901017012	6 ... 14 V	16 ... 30 V	36 ... 60 V	90 ... 130 V	180 ... 240 V
	R901017012	R901017030	R901017048	R901017032	R901017035	R901017037

Further information

Notes:

For general notes on safety, assembly or commissioning, see operating instructions:

07600-B Hydraulic valves for industrial applications

Bosch Rexroth AG
 Hydraulics
 Zum Eisengiesser 1
 97816 Lohr am Main, Germany
 Telefon +49 (0) 93 52 / 18-0
 documentation@boschrexroth.de
 www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without the consent of Bosch Rexroth AG. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. This information also does not release the user from exercising his/her own judgment and conducting his/her own testing. Our products are subject to a natural process of wear and aging.