


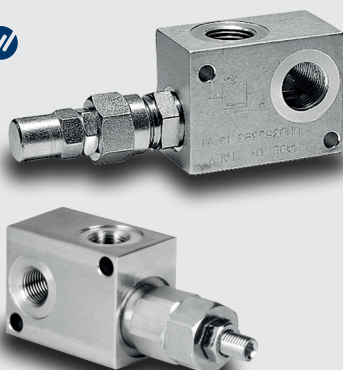


Type VMDL..20 - VMD..35 - VMD..80 pressure relief valves

- Direct acting

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.


		VMDL..2001	VMDL..2002	VMD..3502	VMD..3503	VMD..8003	VMD..8004
Nominal flow		20 l/min (5.3 US gpm)		35 l/min (9.2 US gpm)		80 l/min (21.1 US gpm)	
Max. pressure		Aluminium body = 210 bar (3050 psi) Steel body = 350 bar (5100 psi)					
Fluid		mineral based oil					
Viscosity		from 10 to 200 cSt					
Max. level of contamination		18/16/13 ISO4406					
Fluid temperature		with NBR seals from -20°C (-4°F) to 80°C (176°F)					
Environmental temp. for working conditions		from -40°C (-40°F) to 100°C (212°F)					
Weight	aluminium	0.24 kg (0.53 lb)	0.24 kg (0.53 lb)	0.40 kg (0.88 lb)	0.39 kg (0.86 lb)	0.72 kg (1.59 lb)	0.72 kg (1.59 lb)
	steel	-	-	0.85 kg (1.87 lb)	0.78 kg (1.72 lb)	1.45 kg (3.20 lb)	1.35 kg (2.98 lb)

NOTE - For different conditions, please contact Walvoil Sales Dpt.




Dimensions

VMDL..20

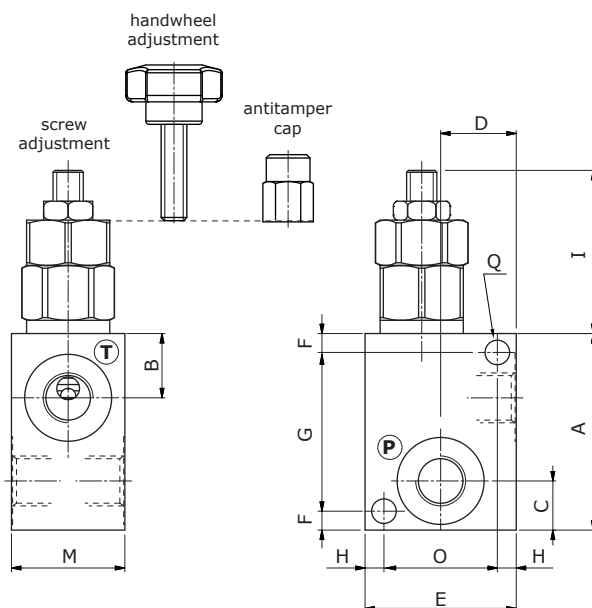

VMD..35 - VMD..80

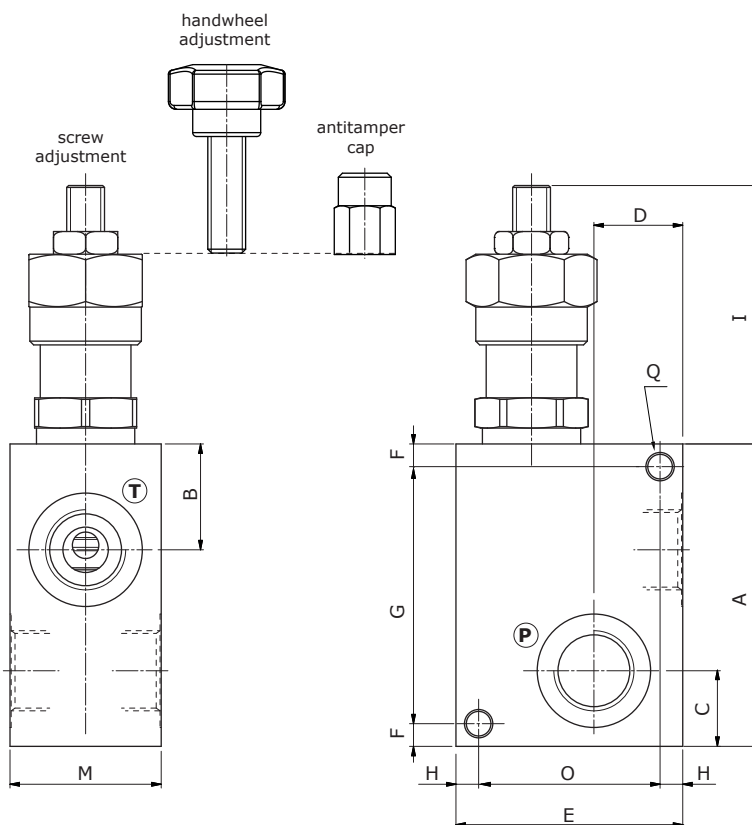

Valve type	All ports
VMDL..2001	G1/4
VMDL..2002	G3/8
VMD..3502	G3/8
VMD..3503	G1/2
VMD..8003	G1/2
VMD..8004	G3/4


Dimensions are in mm-in

Valve type	A	B	C	D	E	F	G	H	I	M	O	ØQ
VMDL..20	45-1.77	17-0.67	13-0.51	20-0.79	40-1.57	5-0.197	42-1.65	5-0.197	44-1.73	30-1.18	30-1.18	6.5-0.256
VMD..35	65-2.56	24-0.95	17-0.67	20-0.79	50-1.97	5-0.197	53-2.09	6-0.236	64-2.52	35-1.38	34-1.34	6.5-0.256
VMD..80	80-3.15	28-1.10	20-0.79	23.5-0.93	60-2.36	6-0.236	68-2.68	6-0.236	77-3.03	40-1.57	48-1.89	6.5-0.256

Ordering codes and description composition

Port size: **01**
- aluminium
S = steel

setting range: **B 1**
Adjustment option:
1 = screw type
2 = handwheel type
3 = antitamper cap

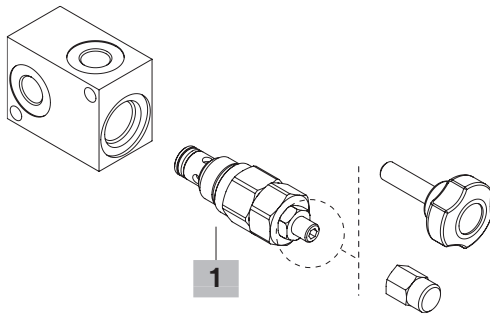

Type		Setting range bar (psi)	Std. setting bar (psi)
VMDL..20	A	5-60 (72.5-870)	30 (435)
	B	50-240 (725-3500)	150 (2200)
	C	90-350 (130-5100)	250 (3600)
	D	20-130 (290-1900)	70 (1000)
VMD..35	A	5-50 (72.5-725)	30 (4.35)
	B	40-210 (580-3050)	150 (2200)
	C	100-350 (1450-5100)	210 (3050)
VMD..80	A	5-50 (72.5-725)	30 (580)
	B	40-260 (580-3770)	150 (2200)
	C	120-350 (1750-5100)	210 (3050)

VMD complete valves

Standard setting 150 bar @ 5 l/min (2200 psi @ 1.32 US gpm)

TYPE	CODE	DESCRIPTION
------	------	-------------

Configuration with G1/4 standard thread

VMDL2001B1	1110711100	Aluminium body, setting range from 50 to 240 bar (725-3500 psi)
-------------------	------------	---

Configuration with G3/8 standard thread

VMDL2002B1	1110721100	Aluminium body, setting range from 50 to 240 bar (725-3500 psi)
-------------------	------------	---

VMD3502B1	1110821100	Aluminium body, setting range from 40 to 210 bar (580-3050 psi)
------------------	------------	---

VMDS3502B1	1110822100	Steel body, setting range from 40 to 210 bar (580-3050 psi)
-------------------	------------	---

Configuration with G1/2 standard thread

VMD3503B1	1110821101	Aluminium body, setting range from 40 to 210 bar (580-3050 psi)
------------------	------------	---

VMD8003B1	1110831100	Aluminium body, setting range from 40 to 260 bar (580-3770 psi)
------------------	------------	---

VMDS3503B1	1110822101	Steel body, setting range from 40 to 210 bar (580-3050 psi)
-------------------	------------	---

VMDS8003B1	1110832100	Steel body, setting range from 40 to 260 bar (580-3770 psi)
-------------------	------------	---

Configuration with G3/4 standard thread

VMD8004B1	1110831101	Aluminium body, setting range from 40 to 260 bar (580-3770 psi)
------------------	------------	---

VMDS8004B1	1110832101	Steel body, setting range from 40 to 260 bar (580-3770 psi)
-------------------	------------	---

For different configurations and SAE thread please contact our Sales Dpt.

1 Direct acting pressure relief valves

Standard setting 150 bar @ 5 l/min (2200 psi @ 1.32 US gpm)

TYPE	CODE	DESCRIPTION
------	------	-------------

For VMDL..20 valve

MC08F/0G2B	0MC08002069	Screw adjustment from 50 to 240 bar (725-3500 psi)
-------------------	-------------	--

For VMD..35 valve


VMDC35B1(M20X1,5)	1100220400	Screw adjustment from 40 to 210 bar (580-3050 psi)
--------------------------	------------	--

For VMD..80 valve


VMDC80B1(M26X1,5)	1100230400	Screw adjustment from 20 to 260 bar (290-3770 psi)
--------------------------	------------	--

Rating diagrams

VMDL..20 pressure vs. flow
standard setting @ 5 l/min (1.32 US gpm)

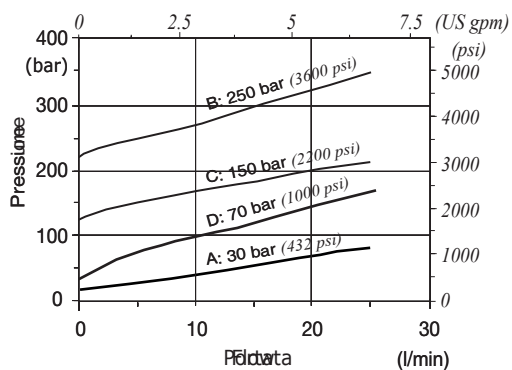

VMD..35 pressure vs. flow
standard setting @ 5 l/min (1.32 US gpm)

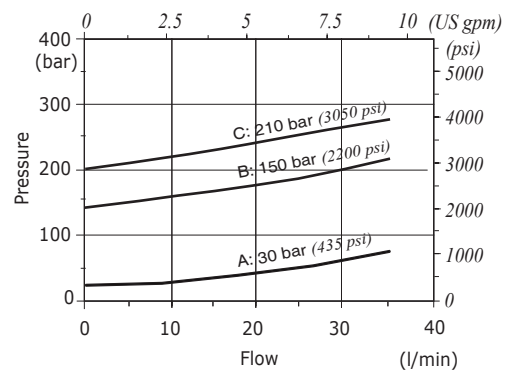

VMD..80 pressure vs. flow
standard setting @ 5 l/min (1.32 US gpm)

